

# Victory® 140

ADVANCED ENGINEERED FOR  
POWERFUL PERFORMANCE  
AND EXCEPTIONAL STYLE

## VICTORY® 140

Bristling with high performance features like a full suspension, low-profile tyres and a hydraulic sealed brake system the **Victory 140** is a powerful blend of power and precision. The Victory 140 features sleek aggressive style and a wealth of standard luxury touches like a wraparound delta tiller and LED lighting making it the ultimate outdoor scooter.




**Victory 140**  
Shown above with optional shield and pillow-top seat

# Victory® 140

Weight capacity:	181 kg
Maximum speed <sup>1</sup> :	Up to 20 km/h
Ground clearance <sup>2</sup> :	13.75 cm
Turning radius:	149.75 cm
Overall length <sup>2</sup> :	140 cm
Overall width <sup>2</sup> :	71 cm
Front tyres:	10 cm x 33 cm
Rear tyres:	10 cm x 33 cm
Suspension:	Front and Rear
Range per charge <sup>1</sup> :	Up to 35 km
Maximum obstacle climbing ability:	10 cm
Total Weight Without Batteries:	N/A
Heaviest piece when disassembled:	N/A – 1 piece frame
Standard seating:	Type: Fold flat seat Weight: N/A Material: Black Vinyl Dimensions: width – N/A depth – N/A
Drive System:	Rear-wheel drive, sealed transaxle, 24-volt DC motor
Dual Braking System:	Electronic, regenerative, and electromechanical
Battery Requirements <sup>3</sup> :	Two 12-volt, deep cycle Size: Group 24 (standard)/Group 31 (optional) Weight: <b>Group 24:</b> 24.27 kg each; <b>Group 31:</b> 31.5 kg each
Battery Charger:	8-amp, off-board

Colors:

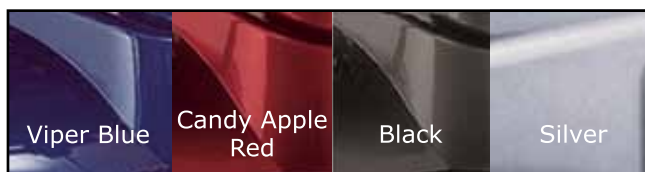

<sup>1</sup>Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tyre condition.

<sup>2</sup>Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or - 3%).

<sup>3</sup>AGM or Gel-Cell type required.

NOTE: All specifications subject to change without notice.

"The information contained herein is correct at the time of publication; due to Pride's commitment to constant improvement and development, we reserve the right to alter specifications without prior notice".

"Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement".

## Features

- Full suspension for optimum handling
- Sealed hydraulic brakes
- Large 33 cm solid tyres for excellent outdoor performance
- Full lighting package including directional signals and lower headlight
- Delta tiller with wrap-around handles
- Easily accessible tie down points (for transport of unoccupied scooter)
- Rear view mirror standard

## Options

- Front shield
- Pillow-top seat
- Forearm crutch holder
- Cane/crutch holder
- Wishbone crutch holder
- Oxygen tank holder
- Rear basket
- Safety flag
- Walker holder
- Durable weather cover